


Motorlu Konveyör Bant

Yüksek performanslı motorlu konveyör bantları

Gelişime ortak olun

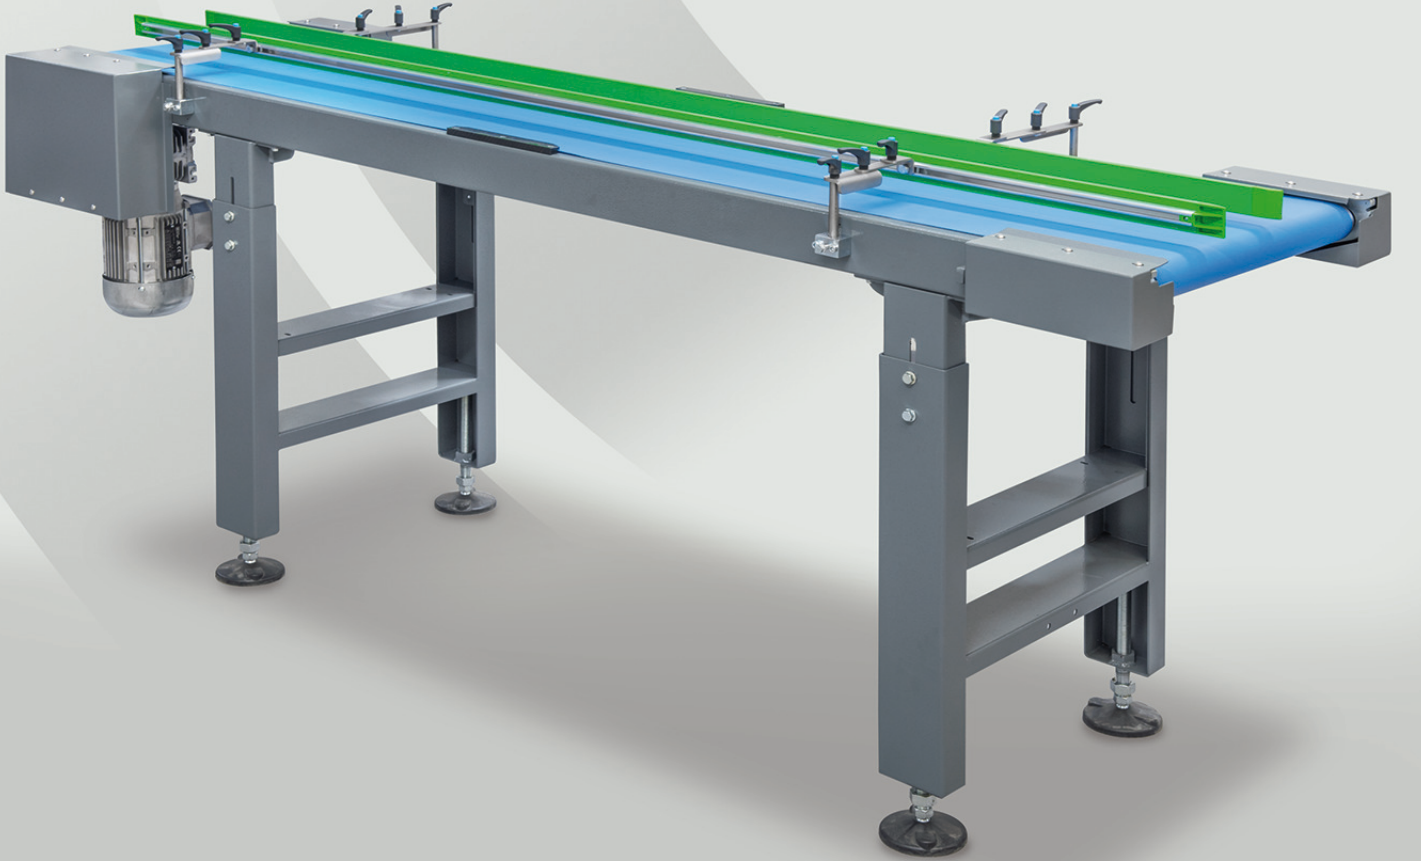

Motorlu Konveyör Bant

Yüksek performanslı motorlu konveyör bantları


MOTORLU KONVEYÖR BANTLAR									
Ebatlar (mm)					Ortalama Enerji Tüketimi	Kurulu Güç 400V, 3 faz	Ağırlık (kg)		
W	L	H	a	b			Net	Brüt	
250 X	1000	840 - 1100	436	1011	0,40kW	1-2A	50	70	
	1500	840 - 1100	436	1511	0,40kW	1-2A	80	110	
	2000	840 - 1100	436	2011	0,40kW	1-2A	95	135	
	2500	840 - 1100	436	2511	0,40kW	1-2A	125	170	
	3000	840 - 1100	436	3011	0,40kW	1-2A	150	200	
	3500	840 - 1100	436	3511	0,40kW	1-2A	170	250	
450 X	1000	840 - 1100	636	1015	0,40kW	1-2A	60	75	
	1500	840 - 1100	636	1515	0,40kW	1-2A	95	125	
	2000	840 - 1100	636	2015	0,40kW	1-2A	120	160	
	2500	840 - 1100	636	2515	0,40kW	1-2A	150	200	
	3000	840 - 1100	636	3015	0,40kW	1-2A	180	260	
	3500	840 - 1100	636	3515	0,40kW	1-2A	200	280	
600 X	1000	840 - 1100	796	1017	0,40kW	1-2A	90	130	
	1500	840 - 1100	796	1517	0,40kW	1-2A	120	170	
	2000	840 - 1100	796	2017	0,40kW	1-2A	180	235	
	2500	840 - 1100	796	2517	0,40kW	1-2A	225	285	
	3000	840 - 1100	796	3017	0,40kW	1-2A	270	345	
	3500	840 - 1100	796	3517	0,40kW	1-2A	305	380	
800 X	1000	840 - 1100	979	1013	0,75kW	1-2A	120	165	
	1500	840 - 1100	979	1513	0,75kW	1-2A	180	240	
	2000	840 - 1100	979	2013	0,75kW	1-2A	240	300	
	2500	840 - 1100	979	2513	0,75kW	1-2A	300	360	
	3000	840 - 1100	979	3013	0,75kW	1-2A	360	420	
	3500	840 - 1100	979	3513	0,75kW	1-2A	420	480	
1000 X	1000	840 - 980	1200	1065	0,75kW	1-2A	130	170	
	1500	840 - 980	1200	1565	0,75kW	1-2A	150	200	
	2000	840 - 980	1200	2065	0,75kW	1-2A	260	320	
	2500	840 - 980	1200	2565	0,75kW	1-2A	290	370	
	3000	840 - 980	1200	3065	0,75kW	1-2A	390	510	
	3500	840 - 980	1200	3565	0,75kW	1-2A	450	570	
1200 X	1000	840 - 980	1400	1095	0,75kW	1-2A	150	210	
	1500	840 - 980	1400	1595	0,75kW	1-2A	210	300	
	2000	840 - 980	1400	2095	0,75kW	1-2A	300	420	
	2500	840 - 980	1400	2595	0,75kW	1-2A	380	520	
	3000	840 - 980	1400	3095	0,75kW	1-2A	450	630	
	3500	840 - 980	1400	3595	0,75kW	1-2A	530	680	
1500 X	1000	840 - 980	1750	1133	0,75 / 1,5kW	1-2A	180	220	
	1500	840 - 980	1750	1633	0,75 / 1,5kW	1-2A	210	270	
	2000	840 - 980	1750	2133	0,75 / 1,5kW	1-2A	360	480	
	2500	840 - 980	1750	2633	0,75 / 1,5kW	1-2A	450	560	
	3000	840 - 980	1750	3133	0,75 / 1,5kW	1-2A	540	670	
	3500	840 - 980	1750	3633	0,75 / 1,5kW	1-2A	650	780	
4000	840 - 980	1750	4133	0,75 / 1,5kW	1-2A	760	890		



Opsiyonel



Opsiyonel

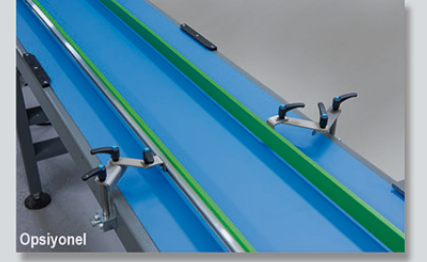

Opsiyonel

Opsiyonel

- 90 degree curve belt Plastic modular belt conveyor
- Control panel and electrical cabinet for stand-alone use including frequency drive
- Emergency stop button or Start & Stop button add-ons
- Stopper connection to stop product flow
- Easily adjustable z-type guide
- Cooling Fan or Ironing Roller attachment for use in PE applications
- Stainless chassis versions for humid/wet working environments
- Sharp corner connection for the passage of thin and small products
- Wheel with brake

Özellikler

- Can be synchronized with all automatic equipment of Maripak range
- Working height adjustable
- Flexible smart synch connection function with an interphase cable
- Color: Metallic Grey (RAL Code: Custom mix)
- Food-grade, certified PVC conveyor belt

Garanti

- Compatible with inlets and outlets of heat tunnels operating in high temperature environments
- ISO 9001 quality certificate approved for compliance with norms
- Mechanical and electrical connection in accordance with the CE mark and the latest CE directives
- 1 year warranty except wearable parts
- Spare parts stock and after-sales manufacturer support
- Parts supply with manufacturer's warranty for 5 years

